




CLEAR2THERE 720P MINI BULLET CAMERA

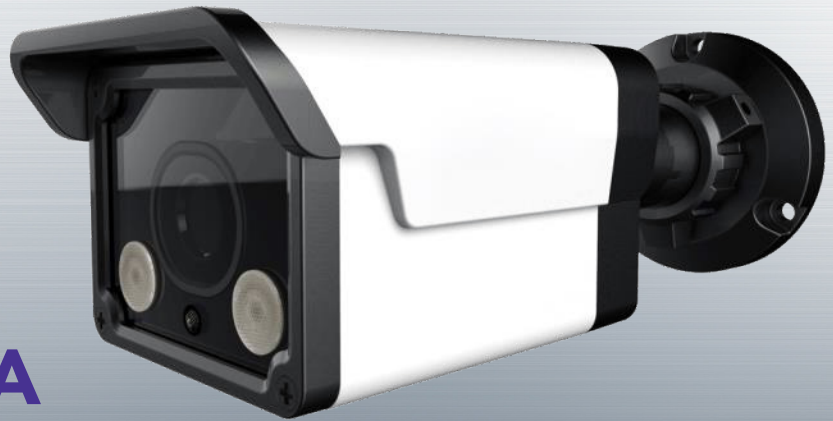

C2TBC4720IPOE

- > Mini Bullet with Fixed Lens
- > 1 Megapixel – 720p
- > H.264 High Profile 4.2
- > 2 Super Flux IR LEDs
- > 12VDC / POE
- > ONVIF Compliant
- > One Year Warranty

H.264 HIGH PROFILE 4.2 COMPRESSION

- Most efficient compression technology available
- Better picture quality
- More storage

FAST MEGAPIXEL IMAGE RATES

- Up to 30fps in full HD 720p mode

MULTI-STREAMING

- Up to three simultaneous independent streams
- Two H.264 and one MJPEG, each stream can be configured independently:
 - Frames per second
 - Resolution
 - Quality
 - Send to different source

MINI SD SLOT

- Record directly to SD card on alarm
- Supports > 2GB card

ONVIF COMPLIANCE

- Fully compliant with ONVIF industry standards

DIGITAL ZOOM

- Zoom live or after event while recording full field of view in HD

REAL TIME STREAMING PROTOCOL (RTSP)

- Allows for compatibility with media players such as Apple QuickTime®, Windows Media Player®, VLC Player®, etc.

VIEWBIQUITY COMPLIANCE

- Fully compliant with the Viewbiquity Cloud Application Suite (VCAS) integration platform



CLEAR2THERE
2904 West 10th Street
Sioux Falls, SD 57104

Tel: 888.201.7075
Email: info@clear2there.com
Web: www.clear2there.com

TECHNICAL SPECIFICATIONS

Resolution	720p
Effective Pixels (H x V)	1280 x 720, 640 x 360
Video Compression	H.264 High Profile Level 4.2, MJPEG
Image Sensor	True Day/Night with ICR Filter
Infrared	2 High Powered Super Flux LED (10-15M)
Frame Rate	Up to 30 fps in 720p mode
Network	10/100 Base-T (RJ-45)
Audio	Full Duplex Audio Connection (mic and speaker sold separately)
Audio Compression	G.711
Storage	Record to ONVIF NVR, FTP, NFS, CIFS, or Mini SD
Privacy Masking	Yes
Protocol	ONVIF
Network Protocol	SMTP – Email Notification, Multi-Casting, RTSP / RTP / RTCP, TCP / UDP, HTTP, DHCP, PPPoE, DDNS, NTP
Minimum Illumination	0.1 Lux (Color) / 0.0 Lux with IR On (B/W)
Lens	Fixed 3.6mm
Motion Detection	Yes
Analog Video Output	Yes
Operating Temp (Celsius)	-10° - 55° (RH 10-85%)
Ratings	IK5 and IP66
Power Requirements	12VDC / PoE
Dimensions	169mm x 70mm x 63mm (6.6" x 2.75" x 2.5")

Clear2there reserves the right to change products or specifications without notice.



CLEAR2THERE
2904 West 10th Street
Sioux Falls, SD 57104

Tel: 888.201.7075
Email: info@clear2there.com
Web: www.clear2there.com